


## BALL VALVE

**MODEL: SD-BVAVA-300, SD-BVAVFS-300**




- Dimension: DN15 - DN50
- Working Pressure: 300 Psi
- Connection: ASME B1.20.1/ BS EN 10226-1/GB/T 7307
- Working Temperature: -20°C to 120°C

| PART NO. | PART NAME     | MATERIAL                   |
|----------|---------------|----------------------------|
| 1        | Handle Sleeve | PVC                        |
| 2        | Gland         | S20100/S30400/S31600       |
| 3        | Packing       | PTFE                       |
| 4        | Stem          | S20100/S30400/S31600       |
| 5        | Thrust Washer | PTFE                       |
| 6        | Body          | CF8/CF8M                   |
| 7        | Ball          | CF8/CF8M                   |
| 8        | End Cap       | CF8/CF8M                   |
| 9        | Seat          | PTFE                       |
| 10       | Gasket        | PTFE                       |
| 11       | Handle (Lock) | S20100/S30400/S31600/Steel |
| 12       | Nut           | S20100/S30400/S31600       |
| 13       | Lock Block    | S20100/S30400/S31600/Steel |

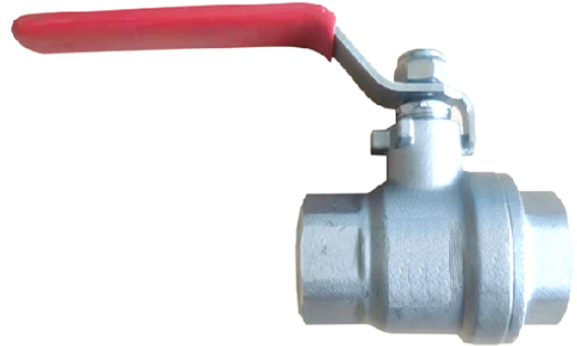

**SD-BVAVA-300**

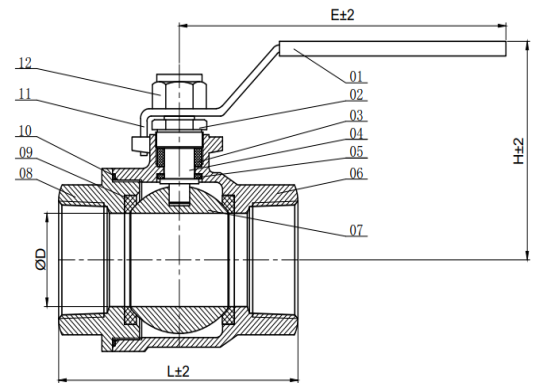

**SD-BVAVA-300**

| DN | L    | E   | H  |
|----|------|-----|----|
| 15 | 64.5 | 100 | 58 |
| 20 | 77   | 100 | 62 |
| 25 | 85   | 126 | 68 |
| 32 | 100  | 126 | 75 |
| 40 | 111  | 150 | 89 |
| 50 | 124  | 150 | 97 |

**SD-BVAVFS-300**

| DN | L    | E   | H  |
|----|------|-----|----|
| 15 | 64.5 | 100 | 58 |
| 20 | 77   | 100 | 62 |

**SD-BVAVFS-300**

