SHIELD®
TRUSTED WORLDWIDE

COMMAND CENTER PHONE

NX10-TEL2-MCCS

SIGNALING
UL LISTED

FEATURES

- Compatible with NEO Series Command Centers
- Class B Supervised Interface Wiring
- Up to Two (2) NX10-TEL2-MCCS[/P] per Riser Module

RATINGS

- All Circuits Power Limited
- Terminals support 12-22 AWG Wire

LISTINGS AND APPROVALS

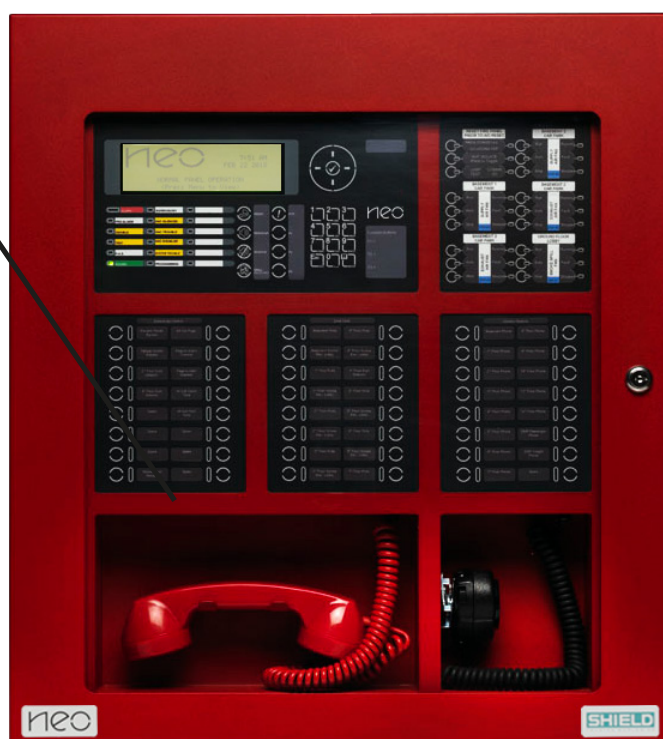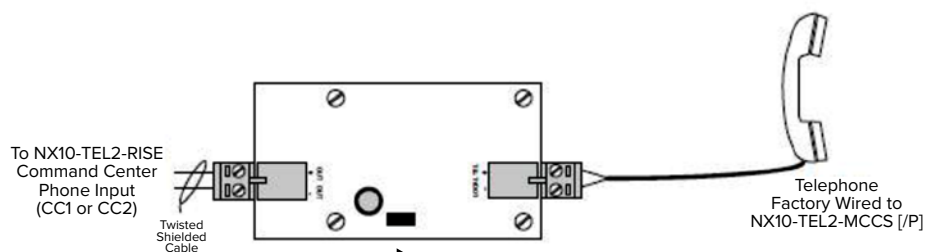- Certified to UL864 10th Edition

PRODUCT INFORMATION

The NX10-TEL2-MCCS assembly includes a firefighter phone, phone enclosure and interface module.

The NX10-TEL2-MCCS interfaces with the Firefighter Phone System2 command center telephone with the Shield NX10-TEL2-RISE riser module.

Both the Shield NX10-CCM-01-ID2 (3x3 command center) and NX10-CCM-02-ID4 (3x5 command center) inner doors can support an NX10-TEL2-MCCS assembly, mounted in the double aperture.

Note: Specifications are subject to change without notice.

WIRING DIAGRAM

To NX10-TEL2-RISE
Command Center
Phone Input
(CC1 or CC2)

Twisted
Shielded
Cable

Telephone
Factory Wired to
NX10-TEL2-MCCS [/P]

ORDERING INFORMATION

NX10-TEL2-MCCS	Command Center Firefighter Phone Assembly with Standard Phone

Note: Specifications are subject to change without notice.