

NX-EM-LPD & NX-EM-NAC MODULES



FEATURES

- Compatible with NEO Series Command Centers.
- Class B Supervised Interface Wiring.
- Up to Two (2) NX-TEL2-MCCS[/P] per Riser Module.
- Standard or Push-to-Talk integral phone.

RATINGS

- ✓ All Circuits Power Limited.
- ✓ Terminals support 12-22 AWG Wire.

LISTINGS AND APPROVALS

- ETL ANSI/UL 864.

PRODUCT INFORMATION


The NX-TEL-2MCCS and NX-TEL-2MCCS/P are assemblies that include a firefighter phone, phone enclosure and interface module.

The difference between the NX-TEL-2MCCS and NX-TEL-2MCCS/P is that the NX-TEL-2MCCS/P includes a push-to-talk firefighter phone. Both assemblies interface the

Firefighter Phone System2 command center telephone with the Shield NX-TEL-2RISE riser module.

Both the Shield CCM-01-ID3 (2x3 command center) and CCM-02-ID2 (3x5 command center) inner doors can support an NX-TEL-2MCCS[/P] assembly, mounted in the bottom left side double aperture.

WIRING DIAGRAM

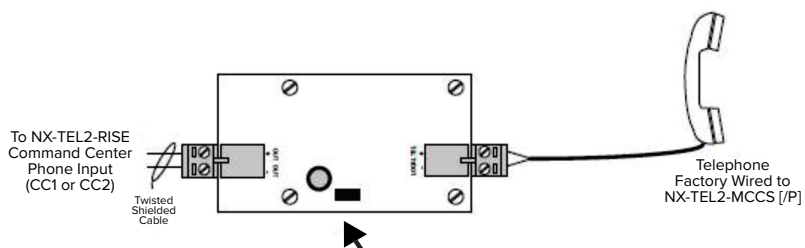

ORDERING INFORMATION

NX-TEL2-MCCS	Command Center Firefighter Phone Assembly with Standard Phone
NX-TEL2-MCCS-P	Command Center Firefighter Phone Assembly with Push-to-Talk (PTT) Phone